



USE INSTRUCTIONS



1. YOUR SET INCLUDES (2) CROSSBARS, (2) KEYS, AND (1) HEX KEY.

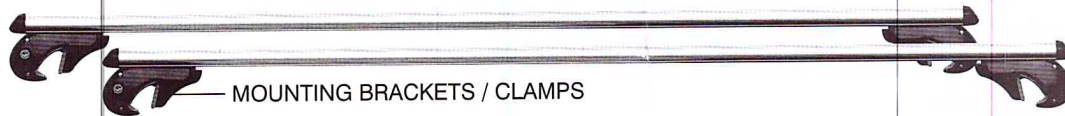

2. Unlock the mounting brackets / clamps on both bars (the red guard opens as key is turned, allowing hex key to be used).
Turn the hex key as shown in fig.1 to loosen all clamps for attachment to existing vehicle side rails.

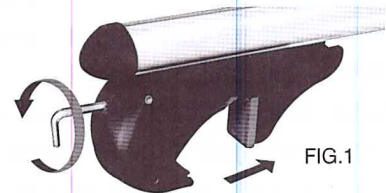



3. When the mounting brackets / clamps are attached to existing vehicle side rails, tighten all 4 clamps using the hex key as shown in fig.2
Make sure mounting brackets / clamps are properly attached; incorrect attachment can lead to unstable load, and loss of load, causing danger to others on the road.

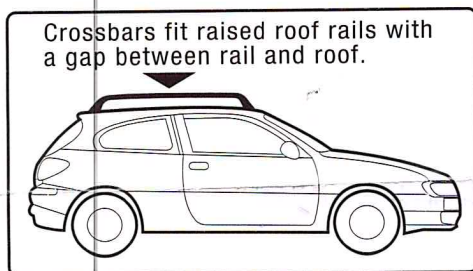


CORRECT



NOT CORRECT

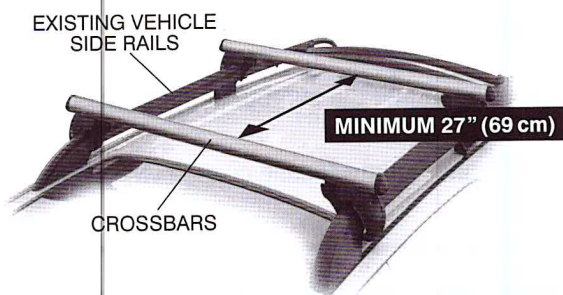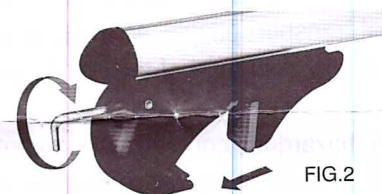


There should be a Minimum distance of 27" (69cm) between the 2 bars when mounted on existing side rails.

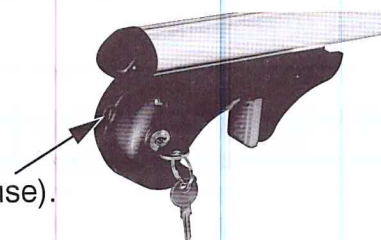

4. When both crossbars are properly attached, use the key to lock / secure in place (the red guard closes, preventing hex key use).

5. make sure any load placed on crossbars is evenly distributed, and does not protrude past the width of the crossbars.
Do not exceed load capacity of 150 lbs (68 kg).
Do not exceed 60 MPH speed when using the crossbars.

6. Beware that carrying loads on the roof of a vehicle affects the drivability and fuel economy of the vehicle. Use caution when accelerating, turning and, especially, braking, as braking distances will be increased.

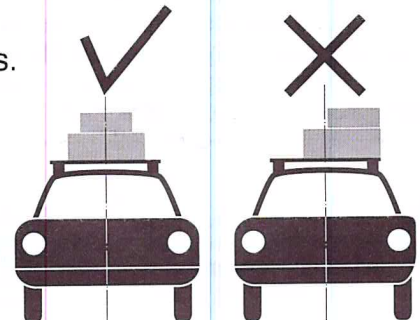

READ ALL WARNINGS BEFORE USE

⚠ WARNINGS

Read and understand all warnings and instruction carefully, failure to do so may result in product damage, property damage and/or personal injury and/or even death. Save these warnings for future reference.

- Do not exceed maximum load capacity of 150lbs (68 kg) for roof mounted crossbars. For all situations the maximum load capacity is not to exceed load limit per vehicles owner's manual.
- Only use on vehicles with raised side rails.
- Do not exceed 60 MPH speed with cargo attached.
- To avoid damage to vehicle roof, it's recommended that 2 people attach, remove and load crossbars.
- Do not concentrate load on to one crossbar. Distribute your load evenly, side to side and between both crossbars.
- Securely fasten load and ensure all the straps, tie-downs and anchor points have adequate strength.
- Whenever possible attach tie-downs to vehicles raised roof rails.
- Re-check and adjust cargo securement if sudden or unexpected bump, jolt, shock, this may have caused movement.
- Carrying loads will affect the vehicles handling and stability, avoid heavy breaking, acceleration and cornering.
- Crossbars are not to be used in strong wind conditions.
- Do not leave loose cargo on the crossbars while vehicle is moving.
- Do not use if any part of the crossbar is damaged. When servicing, use only identical replacement parts approved by the manufacturer.
- Do not store or keep crossbars on the vehicle for extended period of time.
- Do not transport people, animals, or flammable liquids on these crossbars.
- Do not allow any part of the load to overhang the ends of the crossbars.
- Use common sense in maintaining a low load profile. High profile loads create unpredictable wind resistance and can create hazardous conditions. Recommended maximum load height is 18 inch (46cm).
- Check security of the cargo and the attachments regularly at fuel and rest stops.
- Beware of added vehicle height with roof mounted cargo as you drive through limited spaces such as garages, parking structures, tunnels, etc.
- Remove crossbars when not in use or when going through a carwash.
- Beware of the clearance between the cargo carrier and your roof top before operating the sunroof (if applicable). Failure to do so may cause damage to your vehicle sunroof or cargo.
- These crossbars and requirements of cargo management may vary by State and County. Please consult with appropriate agencies for proper usage.

CARE-MAINTENANCE-STORAGE

As with any equipment, it is recommended that you keep clean the product surface after each use. Do not allow harsh chemicals, road salt, mud or dirt to accumulate on the product for extended periods of time. Hand wash the product with mild soap and water only, using non-abrasive cloth. Do not store or keep on the vehicle for extended period of time. Store crossbars in dry location & indoors.



When using this product, always wear Eye Protection that meets A.N.S.I. Z87.1 requirements

CONSUMER HOTLINE

1-800-248-6657

HOURS - 7:00 AM to 3:00 PM Pacific Standard Time
Monday Through Thursday

⚠ CAUTION

The proper attachment and installation of this product is critical and beyond the control of Allied International. Allied International is not responsible for the attachment and installation of this product. Allied International is not liable for any damage resulting from the improper attachment and use of this product.

WARRANTY

This product is warranted against manufacturing defects and/or workmanship. Our liability for defects in this product shall not exceed its purchase price.