


INSTRUCTIONS

1. Place lights in a visible location on the rear of towed vehicle.
2. Run cable to towing vehicle. Position and secure cable.
3. Plugs into standard 4 flat wiring harness.

Magnetic Tow-A-LitesSM are wired with a standard 4 flat wiring harness. If your towing vehicle is not equipped, compatible connectors and additional adapters are available.

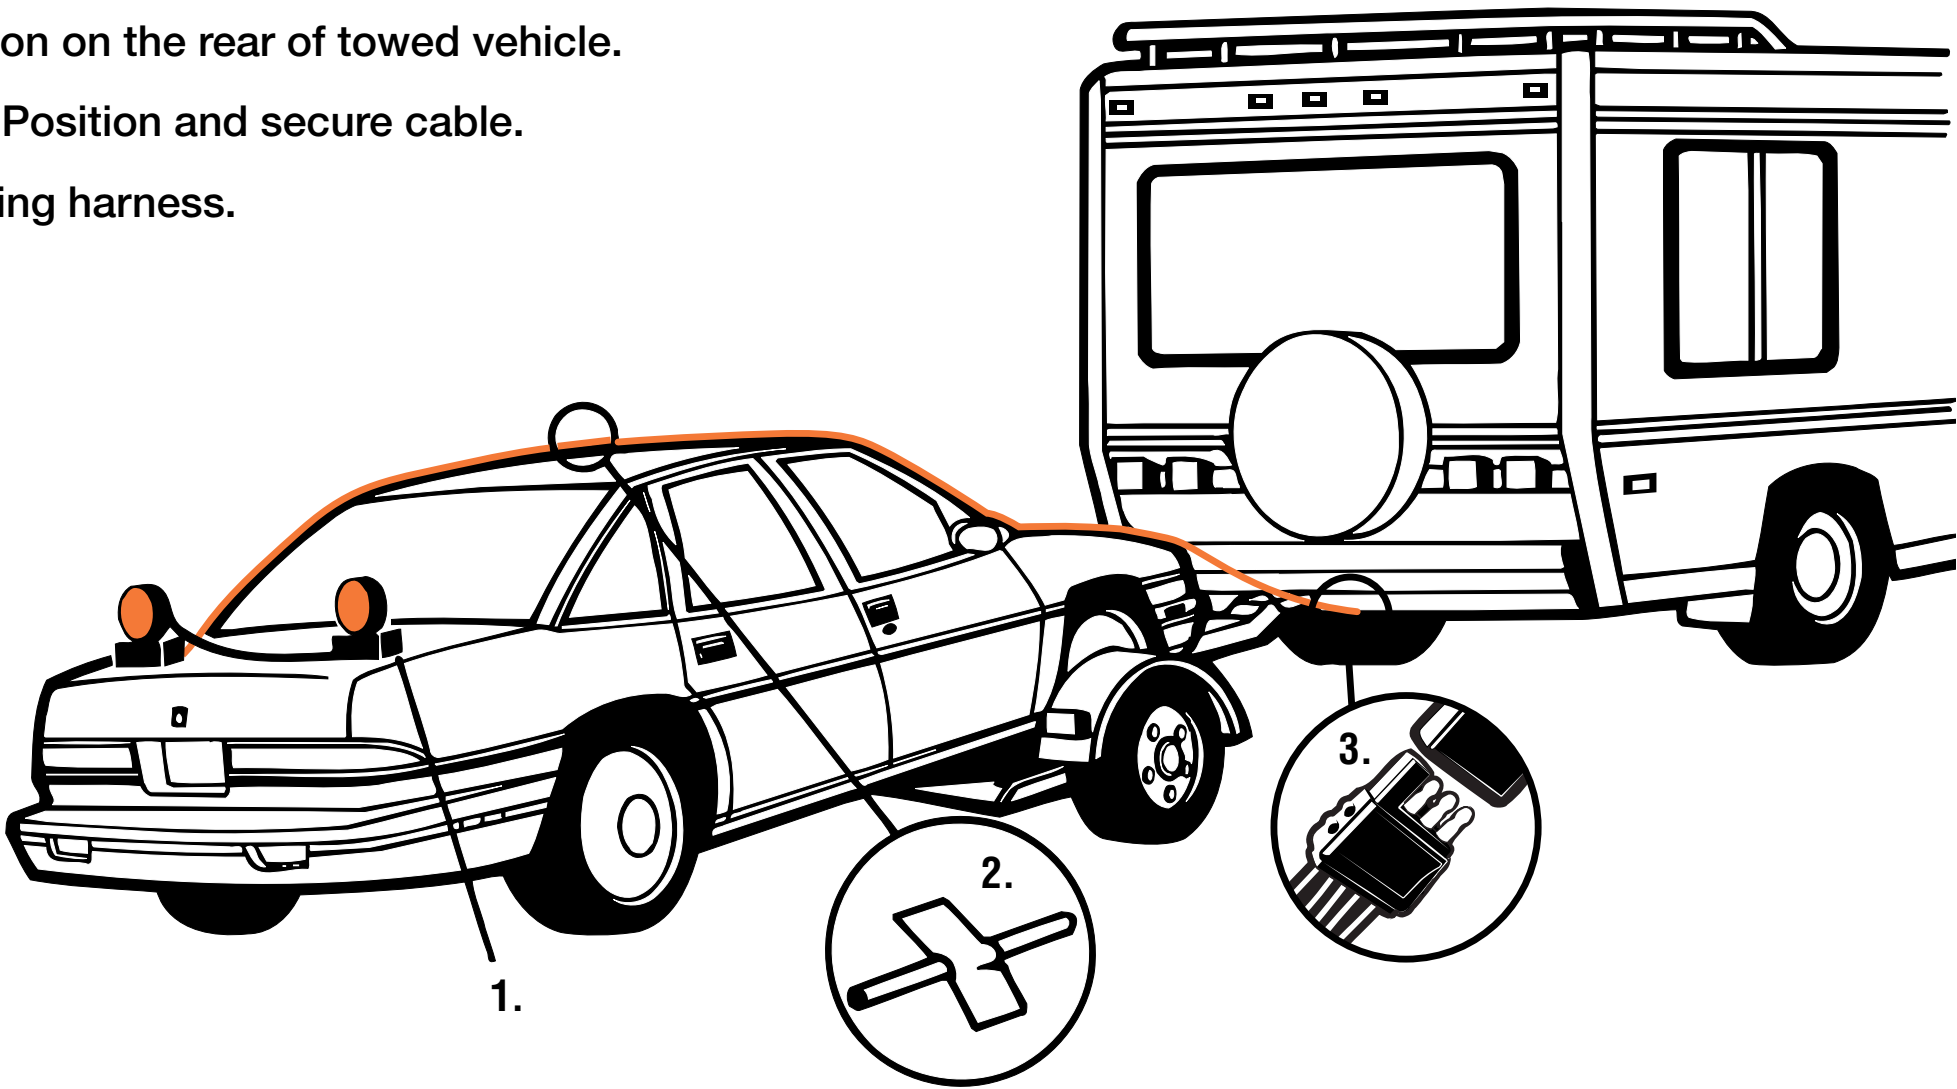

UH-4031-MTOW(A)

Made in China

©01/2009 U-HAUL® INT'L., Printed in U.S.A.



Includes
18 ft.
Connector
Wire!

MAGNETIC TOW-A-LITESSM

MANUFACTURED FOR AND DISTRIBUTED BY U-HAUL® INTERNATIONAL, PHOENIX, AZ 85004

MADE IN CHINA

Includes
18 ft.
Connector
Wire!

Wiring Harness

- Easy Installation
- No Tools Required
- Safe, Reliable, Reusable
- Plugs Into Standard 4 Flat

A line drawing of a car towing a travel trailer. A thick bundle of wires (the harness) is shown connecting the two vehicles. The car's rear lights are also visible.

Full Lighting – Taillights, Brake Lights and Signal Lights

MAGNETIC TOW-A-LITESSM

MAGNETIC TOW-A-LITESSM

Includes
18 ft.
Connector
Wire!

