


INSTRUCTIONS


TO LOAD:

1. Place dispenser on flat surface. Push roll of tape onto tape wheel until fully mounted.

Be sure tape unwind orientation has sticky side down (per diagram 1 above).




2. Pull 5-6 inches of tape off and thread (sticky side down) between smoothing roller and metal loading gate.



3. Pull tape over smoothing roller allowing roll to rotate freely off tape wheel. To increase or decrease unwind tension see diagram 2 above.

TO OPERATE:

1. Apply tape to side of box.
2. Glide the dispenser across box opening.

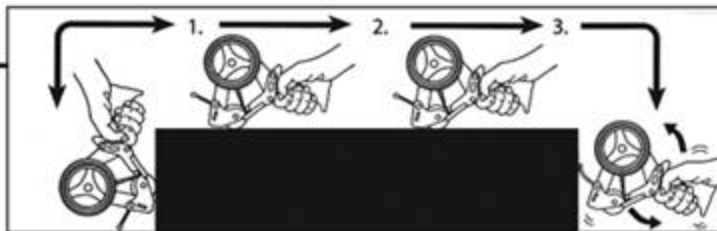

3. Continue down the opposite side of box and tilt dispenser forward for blade to cut tape.