

Installation Instructions


Part Numbers:

24826

77198

60218

Honda Fit

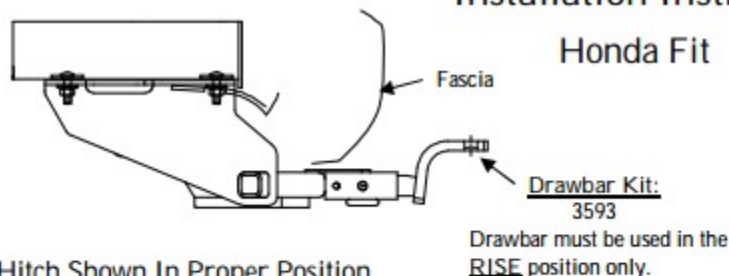

Do Not Exceed Lower of Towing Vehicle
Manufacturer's Rating or

2000 LB (908 Kg.) Max Gross Trailer Weight

200 LB (90.8 Kg.) Max Tongue Weight

Wiring Access Location: PC3, PC4

Hitch Shown In Proper Position

Equipment Required: Screwdriver, Utility knife, Metal file

Fastener Kit: 24826F

Wrenches: 11/16

Drill Bits: None


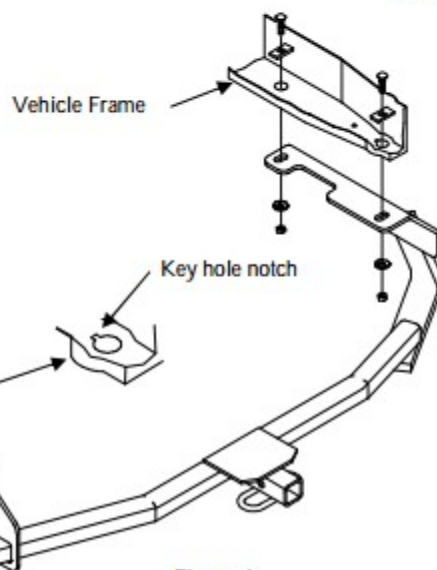


Figure 1.

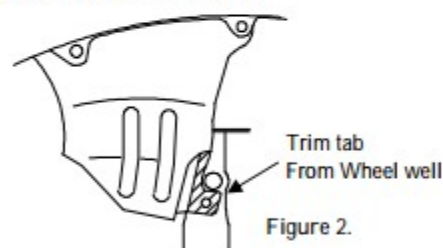

5

Figure 3.

Fasteners typical
Both sides of vehicle

①	Qty. (4)	Carriage Bolt 7/16-14 x 1.50 GR5	④	Qty. (4)	Hex Nut 7/16-14
②	Qty. (4)	Spacer 3/16 x 1 x 2	⑤	Qty. (4)	Pull wire, 7/16
③	Qty. (4)	Conical Toothed Washer 7/16			

- Remove the retainer holding the wheel well tab to bottom of frame rail on driver's side. Trim wheel well tab so that the hitch side bracket will sit flush against the bottom of frame rail. See figure 2.
- Cut a key hole notch in the rearmost hole in frame, both sides, so that the 1" wide spacer (item 2) will fit inside the frame rail.
- Using pull wires provided, install carriage bolts and spacers into frame rail through the key hole into the forward holes.
- For the rearmost hole, fishwire the carriage bolts and spacer blocks into the rear hole and back down through hole. See figure 3.
- First, raise the passenger's side hitch bracket around the tailpipe, then raise the driver's side of hitch up to frame and onto carriage bolts. Do not install bracket on top of wheel well tab.
Note: Be careful not to push bolts and spacers back into frame.
- Install the conical toothed washers and hex nuts onto carriage bolts.

Tighten all 7/16-14 GR5 fasteners with torque wrench to 50 Lb.-Ft. (68 N•M)

Note: Check hitch frequently, making sure all fasteners and ball are properly tightened. If hitch is removed, plug all holes in trunk pan or other body panels to prevent entry of water and exhaust fumes. A hitch or ball which has been damaged should be removed and replaced. Observe safety precautions when working beneath a vehicle and wear eye protection. Do not cut access or attachment holes with a torch.

This product complies with safety specifications and requirements for connecting devices and towing systems of the state of New York, V.E.S.C. Regulation V-5 and SAE J684.